

Electrical:


- 1.Rating:50mA 12V DC
- 2.Contact Resistance:100mΩ Max.
- 3.Insulation Resistance:100MΩ Min,100V DC
- 4.Dielectric Voltage Proof:250V AC For 1min
- 5.Electrically Life:100000 Cycles Min.
- 6.Operating Force:250±50gf
- 7.Environment Temperature:-30°C~+80°C

Materials:

- 1.Cards: Phosphor 0.12, Silver Plated
- 2.Pedestal:LCP, Black
- 3.Shrapnel:Stainless Steel
- 4.Push Button:LCP,White
- 5.Cover:Phosphor 0.12

ORDER INFORMATION


RHTGYS3345-3.5-250-B

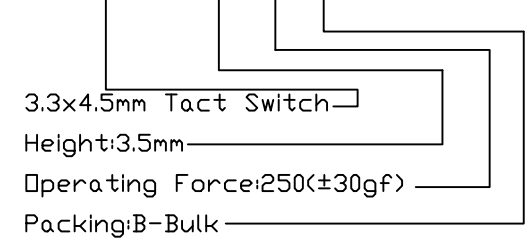

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTGYS3345	

3.3x4.5mm Tact Switch



RHTGYS3345