


SCHEMATIC


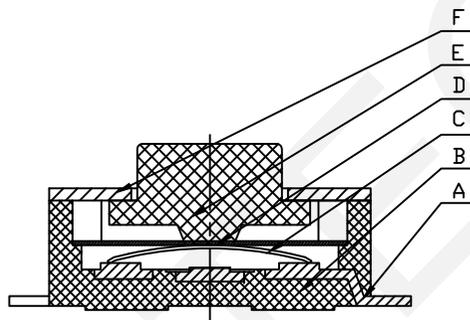


Electrical:

1. Rating: 50mA 12V DC
2. Contact Resistance: 100mΩ Max.
3. Insulation Resistance: 100MΩ Min, 100V DC
4. Dielectric Voltage Proof: 250V AC For 1min
5. Electrically Life: 30000 Cycles Min.
6. Operating Force: 250±50gf
7. Environment Temperature: -30°C~+70°C

Materials:


- A. Cards: Phosphor ,Silver
- B. Pedestal: LCP, Black
- C. Shrapnel: Stainless Steel
- D. Dust Film: 0.05
- E. Push Button: LCP, Black
- F. Cover: Stainless Steel 0.15

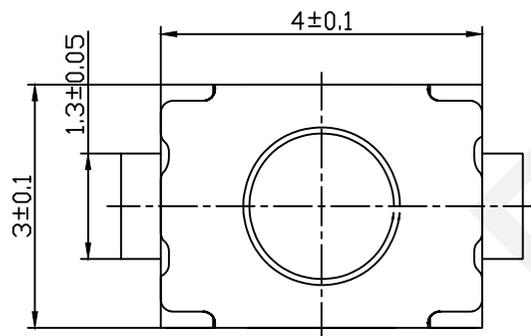

Installation Reference Dimensions
P.C.B Layout

ORDER INFORMATION

RHTGYS3403-2.0-250-B

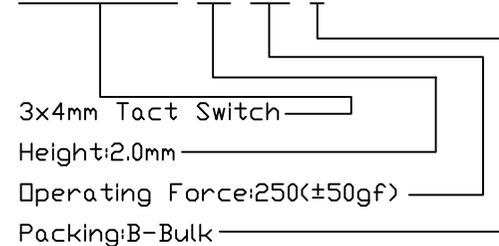

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

3x4mm(Two Small Turtles)Tact Switch
THIRD ANGLE PROJECTION
RHTGYS3403