

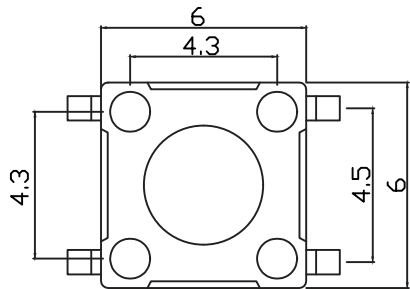
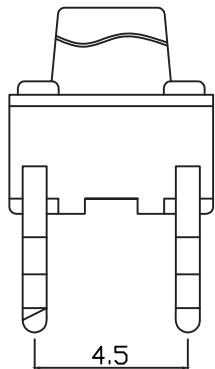


Dimension (Unit: mm)

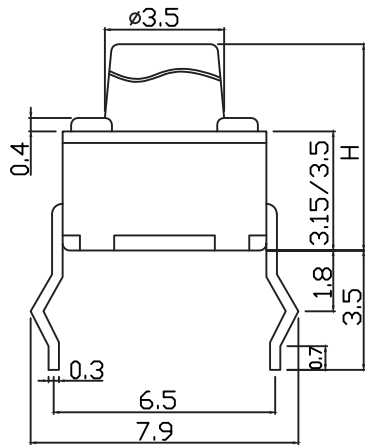

PCB LAYOUT

H
4.3
5.0
7.0
7.3
7.5
8.0
9.5
11.0
12.0
13.0
15.0
17.0
18.0
20.0
22.0
26.0

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance:  $\leq 50\text{m}\Omega$  max (Initial)
3. Insulation Resistance:  $\geq 100\text{M}\Omega$  (min DC 250V)
4. Dielectric Strength: AC250V (50/60Hz For 1minute)
5. Electrically Life: 100000 Cycles
6. Environment Temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
7. Operating Force: 180/250 ( $\pm 30\text{gf}$ )
8. Seal Temperature:  $260^{\circ}\text{C} \sim 280^{\circ}\text{C}$
9. Operating Temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION

RHTGYS6601-4.3-180

Series No

Height: 4.3mm/5.0mm/7.0mm/

7.3mm/7.5mm/8.0mm/9.5mm/11.0mm/

12.0mm/13.0mm/15.0mm/17.0mm/

18.0mm/20mm/22mm/26mm

Operating Force: 180-250gf

**RHTEC** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	APPR BY ZHAN	

6x6mm Tact Switch Series

RHTGYS6601