
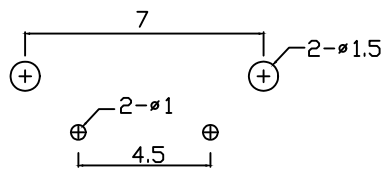
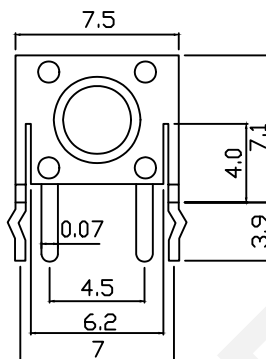


Dimension (unit: mm)



PCB LAYOUT

H
4.3
5.0
6.0
7.0
8.0
13.0

ELECTRICAL

- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ Max<Initial>
- 3.Insulation Resistance: 100MΩ (Min DC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz For 1Minute)
- 5.Electrically Life: 100000 Cycles
- 6.Environment Temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal Temperature:260°C~ 280°C

ORDER INFORMATION

RHTGYS6606-4.3-180

Series No. -

Height:4.3mm/5.0mm/6.0mm/-

7.0mm/8.0mm/13.0mm


Operating Force :180~250gf

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

TACT SWITCH DIP 6X6MM ROHS

THIRD ANGLE PROJECTION



RHTGYS6606