



H1=1.5mm
H2=1.7mm
H3=1.9mm

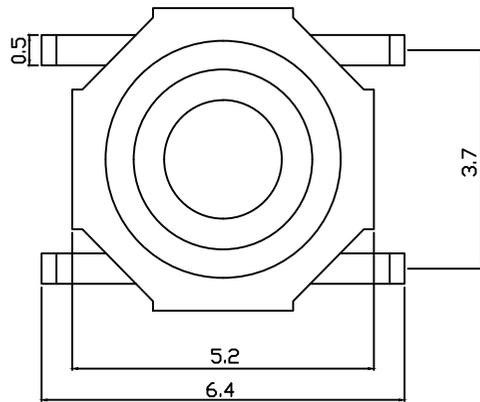

PCB LAYOUT

ELECTRICAL

- 1.Rating:50mA 12V DC
- 2.Contact Resistance :50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-20°C~+70°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C

ORDER INFORMATION

RHTGYS6611-1.5-180-T

Series No:

Height:1.5mm/1.7mm/1.9mm

Operating Force :180~250gf

Packing: B=Bulk T=Tape

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

6x6 Tact Switch Series

THIRD ANGLE PROJECTION

RHTGYS6611