

P.C.B Layout

Electrical:


1. Rating: 50mA 12V DC
2. Contact Resistance: 100mΩ Max.
3. Insulation Resistance: 100MΩ Min, 100V DC
4. Dielectric Voltage proof: 250V AC For 1Min
5. Electrically Life: 100000 Cycles Min.
6. Operating Force: 160±50gf
7. Environment Temperature: -30°C~+80°C

Materials:

1. Cards: Phosphor, Silver Plated
2. Pedestal: LCP, White
3. Shrapnel: Stainless Steel
4. Push Button: LCP, Black
5. Cover: H62, Silver Plated

ORDER INFORMATION

RHTGYS2403-3.5-160-B

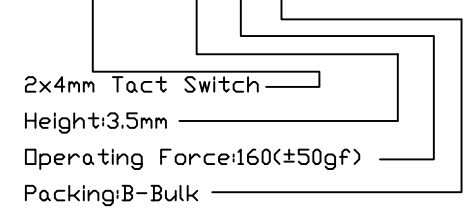

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

|          |                |           |             |
|----------|----------------|-----------|-------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
| 0~3      | 3~18           | 18~50     | 50~120      |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        |

CHK'D BY FENG  
APPR BY ZHAN

2x4mm With Column, Heightening, Tactile Switches  
THIRD ANGLE PROJECTION  
RHTGYS2403