


Dimension (unit: mm)

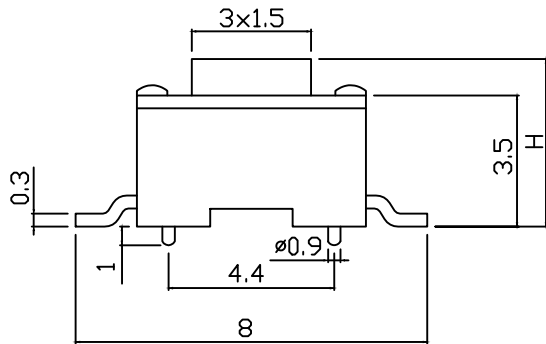

H
4.3
5.0

ELECTRICAL

- 1.Rating:50mA 12V DC
- 2.Contact Resistance :50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-30°C~+120°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C



ORDER INFORMATION



RHTGYS3603-4.3-180-B

Series No:

Height:4.3mm/5.0mm

Operating Force :180~250gf

Packing: B=Bulk T=Tape

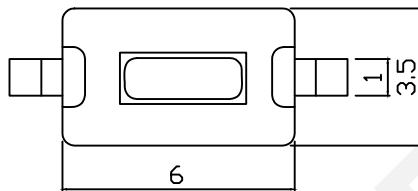


PCB LAYOUT

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


3x6 Tact Switch Series

THIRD ANGLE PROJECTION



RHTGYS3603

Dimension (unit: mm)

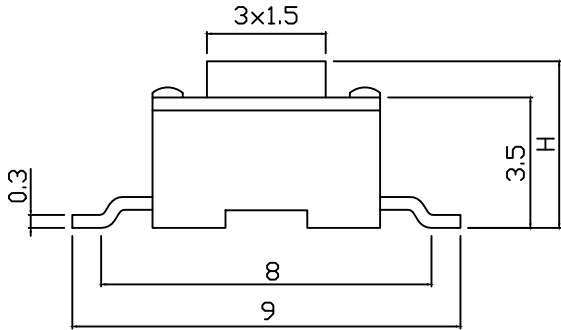

H
4.3
5.0

ELECTRICAL



- 1.Rating:50mA 12V DC
- 2.Contact Resistance :50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-30°C~+120°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C



ORDER INFORMATION

RHTGYS3603B-4.3-180-B

Series No: _____
 Height:4.3mm/5.0mm _____
 Operating Force :180~250gf _____
 Packing: B=Bulk T=Tape _____

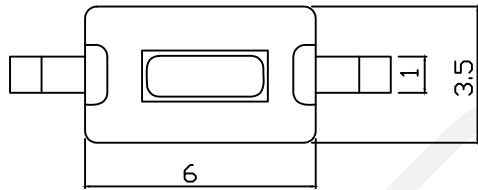


PCB LAYOUT

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

3x6 Tact Switch Series

THIRD ANGLE PROJECTION



RHTGYS3603B