



Dimension (unit: mm)

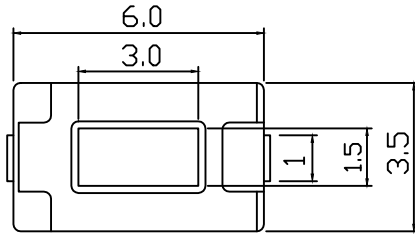

| |
|-----|
| H |
| 4.3 |
| 5.0 |




ELECTRICAL

- 1.Rating:50mA 12V DC
- 2.Contact Resistance :50mΩ Max(Initial)
- 3.Insulation Resistance:100MΩ(Min DC 250V)
- 4.Dielectric Strength:AC 250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-20°C~+70°C
- 7.Operating Force:180/250(±30gf)
- 8.Seal Temperature:260°C~280°C

ORDER INFORMATION

RHTGYS3608-4.3-180-B

Series No: _____
 Height:4.3mm/5.0mm _____
 Operating Force :180~250gf _____
 Packing: B=Bulk T=Tape _____

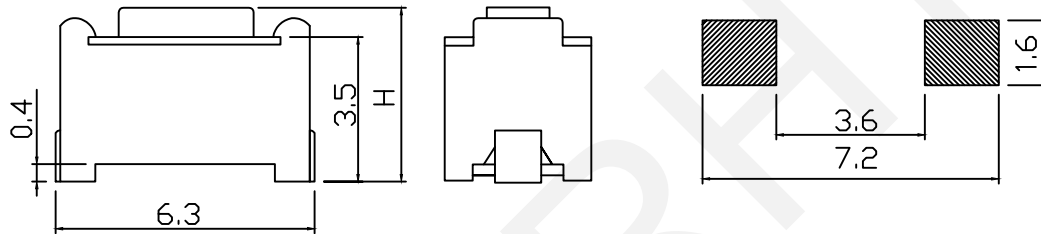

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

| | | | |
|----------|----------------|-----------|-------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 |

CHK'D BY FENG
 APPR BY ZHAN

3x6 Tact Switch Series
 THIRD ANGLE PROJECTION
 RHTGYS3608