


Mounting

Notes:

- Rating: 6A 125V AC: 3A 250V AC
- Contact Resistance: 20 mΩ Max
- Insulator Resistance: 1000 MΩ Min At 500V DC
- Dielectric Strength: 1 Minute 1500V AC
- Operating Temperature: -25°C ~ +85°C
- Electrical Life: 10000 Cycles

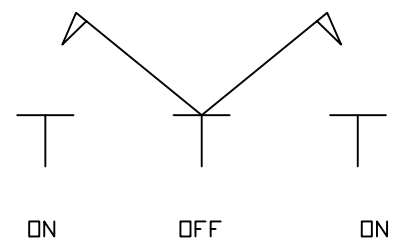

Circuitry

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE: ---		DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Miniature Rocker And
Lever Handle Switches

THIRD ANGLE PROJECTION

RHTGYLS-103-A2T