

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
 Contact Resistance: 20M Ω max
 Insulation Resistance: 500V DC 1000M Ω Min
 Dielectric Strength: 1500V AC 1 Minute
 Operating Temperature: -55°C~+85°C
 Electrical Life :20,000 Cycles

ORDER INFORMATION


RHTGYS-1 02-C 3 X X


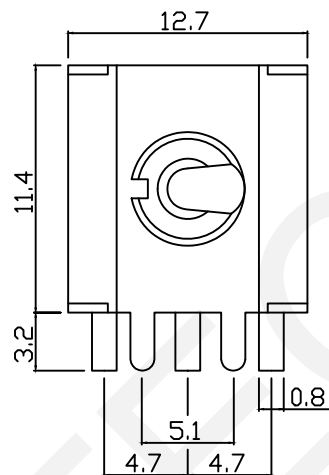
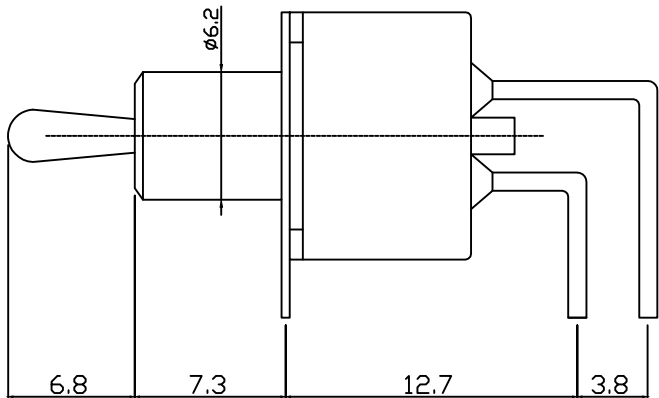
Miniature Toggle
 Switch Series
 POLES 1=Single Pole
 2=Double Pole
 CIRCUIT: 01=ON-OFF 02=ON-ON
 03=ON-OFF-ON
 Handle Type: A=Standard C=Short
 Terminal Type: 1=Solder Terminal
 2=Pc Terminal 3=Pc-H Terminal
 4=Pc-V Terminal
 Handle Cap Type: R=Red B=Black
 W=White Y=Yellow G=Green BL=Blue
 BRACKET: T=With Bracket
 None=Without Bracket

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Miniature Toggle Switch Series
 THIRD ANGLE PROJECTION

 RHTGYS-102-C3



PCB LAYOUT

SPECIFICATIONS

Rating: 5A 125VAC; 2A 250VAC
 Contact Resistance: 20MΩ max
 Insulation Resistance: 500V DC 1000MΩ Min
 Dielectric Strength: 1500V AC 1 Minute
 Operating Temperature: -55°C~+85°C
 Electrical Life: 20,000 Cycles

ORDER INFORMATION

RHTGYS-2 02-C 3 X X


Miniature Toggle
 Switch Series
 POLES 1=Single Pole
 2=Double Pole
 CIRCUIT: 01=ON-OFF 02=ON-ON
 03=ON-OFF-ON
 Handle Type: A=Standard C=Short
 Terminal Type: 1=Solder Terminal
 2=Pc Terminal 3=Pc-H Terminal
 4=Pc-V Terminal
 Handle Cap Type: R=Red B=Black
 W=White Y=Yellow G=Green BL=Blue
 BRACKET: T=With Bracket
 None=Without Bracket

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

Miniature Toggle Switch Series



RHTGYS-202-C3