
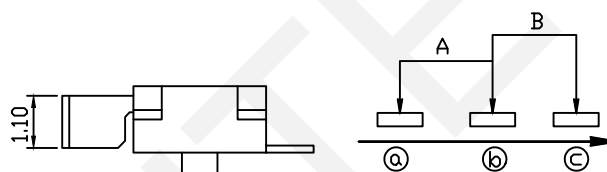


P.C.B LAYOUT

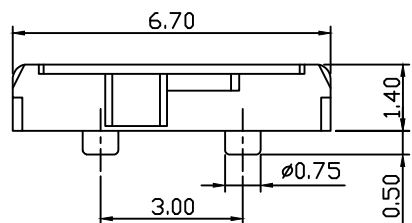

CIRCUIT

ELECTRICAL  
 Rating:0.3A 6V DC  
 Function:1P2T  
 Timing:Non-Shorting  
 Contact Resistance:70mΩ Max.  
 Insulation Resistance:100MΩ Min.at 500V DC  
 Dielectric Strength: AC 500V For 1Min  
 Operating Temper:-20°C~75°C  
 Operating Force:250±150gf  
 Life Test:10000 Cycles  
 PACKING:1000PCSReel

Order Information:  
 RHTGYSS-1290BN


SPDT

6	STRETCH PIECE	SUS	Natural	1
5	TERMINAL A/B/C	C2680	Ag PLATED	3
4	CONTACT	C5210	Ag PLATED	1
3	BOTTOM	PA46	Black	1
2	COVER	SUS	Ag PLATED	1
1	STEM	PA46	Black	1
NO.	PARTS	MATERIAL	FINISHING&COLOR	Q'TY

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---  
 0~3 3~18 18~50 50~120  
 ±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

Mini Slide Switch,6.7x2.8x1.4mm,  
 SPDT SMD Horizontal  
 THIRD ANGLE PROJECTION  
  
 RHTGYSS-1290BN