

CIRCUIT

ELECTRICAL

Rating:0.3A 6V DC

Function:2P2T

Timing:Non-Shorting

Contact Resistance:70mΩ Max.

Insulation Resistance:100MΩ Min.at 500V DC

Dielectric Strength: AC 500V For 1Min

Operating Temper:-20°C~75°C

Operating Force:250±150gf

Life Test:10000 Cycles

Order Information:




RHTGYSS-2235-X B

DPDT

STEM Color:

B-Black W-White

PACKING:B-BAG

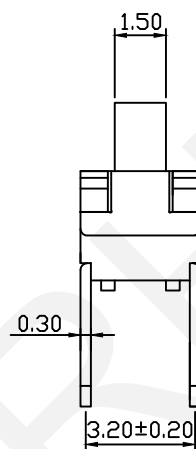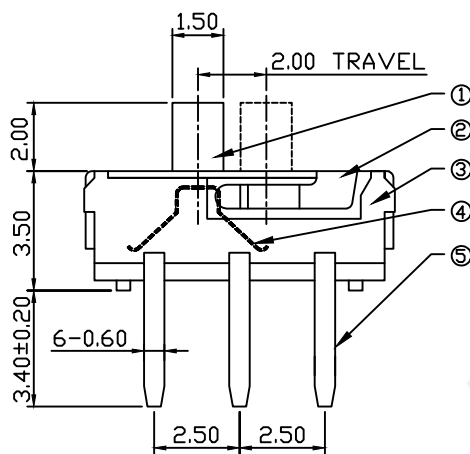

P.C.B LAYOUT

| NO. | PARTS | MATERIAL | FINISHING&COLOR | Q'TY |
|-----|----------------|----------|-----------------|------|
| 5 | TERMINAL A/B/C | C2680 | Ag PLATED | 6 |
| 4 | CONTACT | C5210 | Ag PLATED | 2 |
| 3 | BOTTOM | PA46 | Black | 1 |
| 2 | COVER | SUS | Natural | 1 |
| 1 | STEM | PA66 | Black OR White | 1 |



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Mini Slide Switch,9.0x3.5x3.5mm,DPDT

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYSS-2235

1

2

3

4

5

6

7

8

9