

SPECIFICATIONS

Rating: 6A 250VAC;12A 125VAC
 Contact Resistance: 30MΩ Max
 Insulation Resistance:500VDC 100MΩ Min
 Dielectric Strength:500V AC 1 Minute
 Operating Force:400gf~800gf
 Electrical Life:10,000 Cycles



ORDER INFORMATION


RHTGYS39 - 2 2 N 03 -X X -X

Slide Switch Type _____
 Pole _____
 Throw _____

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0


Sequential No. _____

Knob Type




Knobe Height _____


Operating Force _____

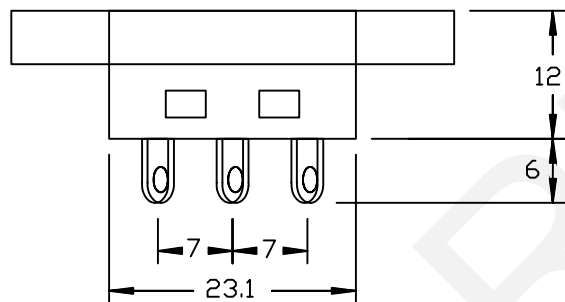

SCHMATIC



P.C.B.HOLE DETAIL




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

(2P2T) Slide Switch Series

THIRD ANGLE PROJECTION



RHTGYS39-22N03