


Circuit Diagram





Material:


- 1.Cover:Polycarbonate
- 2.Housing:PA66
- 3.Spring:Carbon Cable Steel Wire
- 4.Contacts:PDM
- 5.Reed
- 6.Crochet Hook

Specification:

- Rating: 0.1A 30V DC
- Contact Resistance:0.03Ω Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: AC 250V(50Hz) Min
- Mechanical Life: 100000 Cycles
- Electrical Life: 50000 Cycles
- Operating Force:160±80g

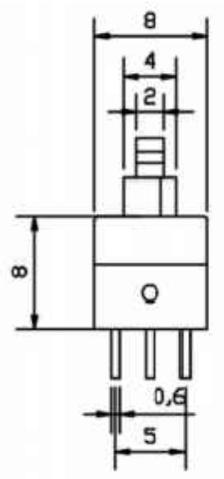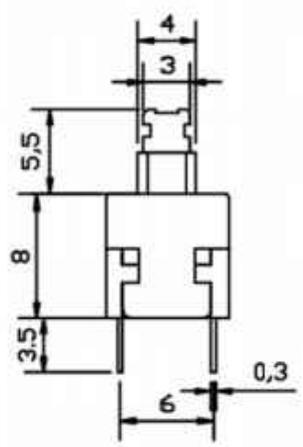

Hole Dimensions



Order Information:


RHTGY8.0x8.0-X

Mini Push Switch

8.0x8.0mm

Function:

0=Non Lock Type 1=With Lock Type



NINGBO RHT ELECTRONIC CO.,LTD

| | | | | |
|----------|----------------|-------|-----------|---------------|
| UNITS:mm | SHEET SIZE: A4 | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN |

| | |
|----------------------------|--------------|
| Mini Push Switch 8.0x8.0mm | |
| THIRD ANGLE PROJECTION | RHTGY8.0X8.0 |