
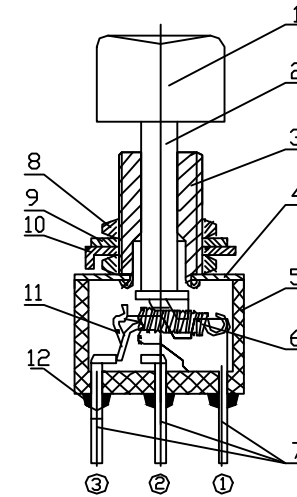
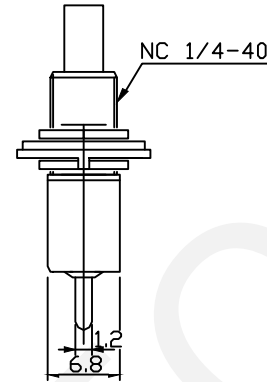


Circuit Diagram

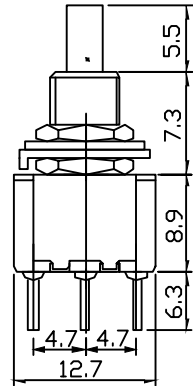

NO.	Parts Name	The Parts Of Material	Plating	RoHS
1	Button	PA46	-----	RoHS
2	Pole	PA46	-----	RoHS
3	Bushing	Brass	Plate Nickel	RoHS
4	Steel crust	Stainless Steel	-----	RoHS
5	Housing	Bakelite	-----	RoHS
6	Spring	Steel Wire	-----	RoHS
7	Terminals	Brass	Plate Silver	RoHS
8	Nuts	Brass	Plate Nickel	RoHS
9	Zigzag Washer	Stainless Steel	-----	RoHS
10	Fix Washer	Stainless Steel	-----	RoHS
11	Movable Plate	Brass	Plate Silver	RoHS
12	Epoxy Seal	5010A/B	-----	RoHS

Specification:

Rating:1A 250V AC;3A 125V AC

Contact Resistance:20mΩ Max

Insulation Resistance:DC500V 1000MΩ Min

Withstanding Voltage:AC1000V/1Min

Electrical Life:10000 Cycles

Operating Temperature: -25°C~+85°C

ORDER INFORMATION

RHTGYP5-1C0-A2

Switching Position

Function



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Momentary Pushbutton Switch

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTGYP5-1C0-A2

1

2

3

4

5

6

7

8

9