

MATERIAL

- 1.Housing: Nylon 66
- 2.Rocker: PC & PA66
- 3.Contacts: Silver Alloy
- 4.Terminal: Brass Silver Plated
- 5.Lamp: Neon Lamp,Tungsten Lamp
- 6.Spring: SWP,SUS
- 7.Movable Arm: Brass Silver Plated


ELECTRICAL

- 1.Electrical Rating:6(4)A 250VAC/10A 125VAC
- 2.Mechanical Life:Over 30000 Cycles
- 3.Electrical Life: Over 10000 Cycles
- 4.Contact Resistance:≤50mΩ
- 5.Insulation Resistance:≥100MΩ
- 6.High Voltage Resistance:>1500V 1 min
- 7.Ambient Temperature:Terminal Side -20°C~+85°C;
Actuating Side -20°C~+55°C
- 8.Storage Temperature: -30°C~+80°C Max
- 9.Atmospheric Humidity: Max 85%
- 10.Actuating Force: 4~8N(Depends On Different Witch Function)
- 11.Flammability: UL94V-2
- 12.Temperature Rise At The Terminal: Max 30°C (UL1054)
- 13.Solder Ability Of Terminal: Max 350°C 3S

ORDER INFORMATION

RHTGY13- A 1 01 1 1 B B

Series No

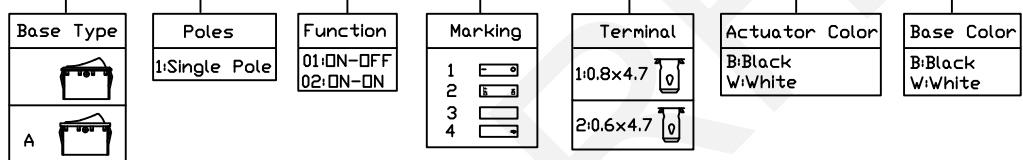

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Rocker Switch Series

THIRD ANGLE PROJECTION

RHTGY13