
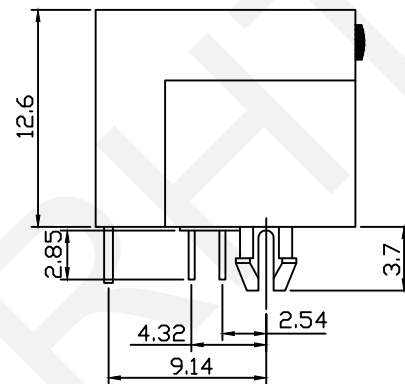


PCB Layout

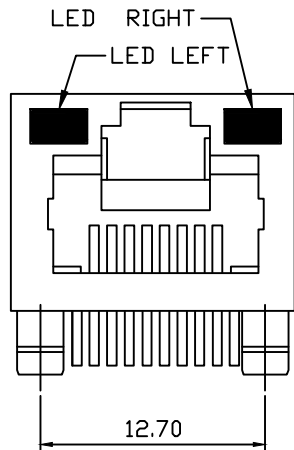

Material:

Housing:PBT+Glass Filled Polyester  
 Flammability Rating : UL94V-0  
 Contacts: Phosphor Bronze  $\phi 0.46\text{mm}$   
 Plating:Gold Plating

Electrical:

Voltage Rating:125VAC  
 Current Rating:1.5A  
 Contact Resistance:30m $\Omega$  Max.  
 Insulation Resistance: 500M $\Omega$  Min.  
 Dielectric Strength:1000VAC Rms 50Hz, 1 Min.  
 Durability:600 Cycles Min.  
 Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information

RHTLY15-8P8C-1x1-G/Y-XX

Contacts:8P8C

LED Code:LEFT/RIGHT

G/y-Green/Yellow

Y/G-Yellow/Green

Plating Code:

01-Fu"Gold Plating 02-3u"Gold Plating

03-6u"Gold Plating 04-15u"Gold Plating

05-30u"Gold Plating


**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

Modular Jacks RJ45-8P8C 1X1 With SHELL

THIRD ANGLE PROJECTION



RHTLY15-8P8C1X1