


PCB Layout

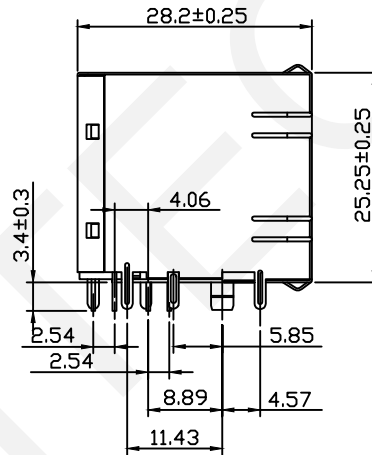

Material:  
 Housing:PBT+Glass Filled Polyester  
 Flammability Rating : UL94V-0  
 Contacts: Phosphor Bronze  $\varnothing$ 0.46mm  
 Plating:Gold Plating  
 Shield:Brass,Tin Plating

Electrical:  
 Voltage Rating:125VAC  
 Current Rating:1.5A  
 Contact Resistance:30m $\Omega$  Max.  
 Insulation Resistance: 500M $\Omega$  Min.  
 Dielectric Strength:1000VAC Rms50Hz, 1 Min.  
 Durability:600 Cycles Min.  
 Operation Temperature:-40 $^{\circ}$ C~+70 $^{\circ}$ C

Order Information  
 RHTLY02-8P8C-2X4-X-XX

Contacts:8P8C  
 Shield Code:  W-With EMI  
                    W/O-Without EMI  
 Plating Code:  01-Fu' Gold Plating  
                    02-3u' Gold Plating  
                    03-6u' Gold Plating  
                    04-15u' Gold Plating  
                    05-30u' Gold Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	Modular Jacks,RJ45-8P8C Jack 2x4 With Shield	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTLY02-8P8C-2X4-X-xx



RHTLY02-8P8C-2X4-X-xx