

TOLERANCES EXCEPT AS NOTED

Material

Housing:PA66, UL94V-0

Pin header:Brass, Tin plated

Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ


Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃


Order Information

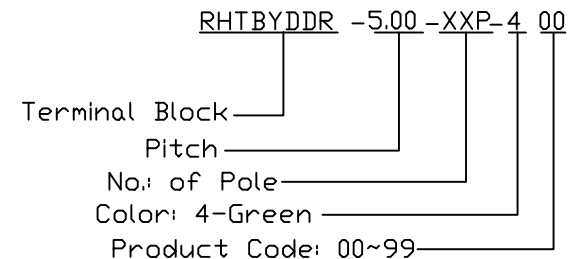




NINGBO RHT ELECTRONIC CO.,LTD

| | | | | | | |
|----------|----------------|-------|--------|---------------|------------------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | | | | SCALE:--- | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | THIRD ANGLE PROJECTION | |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | RHTBYDDR-5.00-XXP-4-00 | |

Pluggable Terminal Block 5.00MM



RHTBYDDR-5.00-XXP-4-00

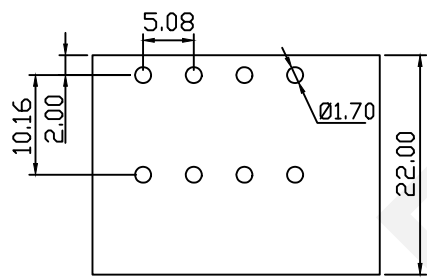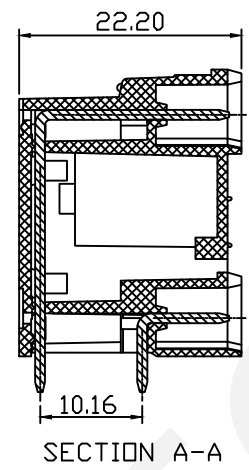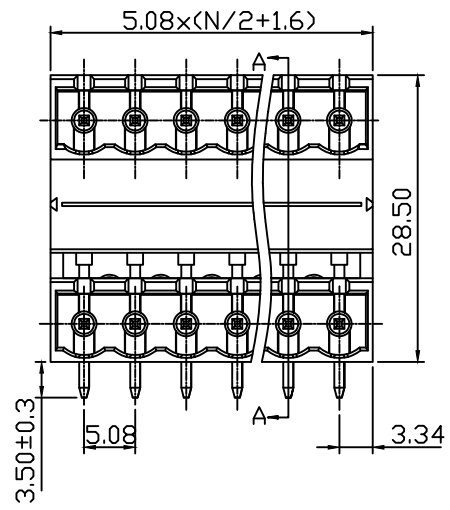

TOLERANCES EXCEPT AS NOTED

Material
 Housing:PA66, UL94V-0
 Pin header:Brass, Tin plated

Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min

Mechanical
 Temp. Range:-40°C~+105°C

Order Information

RHTBYDDR -5.08-XXP-4 00

Terminal Block
 Pitch
 No. of Pole
 Color: 4-Green
 Product Code: 00~99

NINGBO RHT ELECTRONIC CO.,LTD

| | | | | | |
|----------|----------------|-------|-----------|---------------|-------------|
| UNITS:mm | SHEET SIZE: A4 | | SCALE:--- | | DRWN BY PAN |
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | |

Pluggable Terminal Block 5.08MM

THIRD ANGLE PROJECTION

RHTBYDDR-5.08-XXP-4-00